



PARTNER
FOR THE EXPERTS

Sb *Volumetric Dosing Line* SERIES

sb
SERIES

CREATE PRACTICAL VALUE WITH MECHANICAL AESTHETICS



Volumetric dosing line is applicable for injection molding machines, extrusion; blow molding machines to feeding the material for dosing raw material pigments, additives, and recycled granulates. Permit direct equip with injection, blow molding and extrusion machines with small featuring dimension, rapidity speed and precision. Volumetric Dosing Line SB-series is driven by DC motor with digital controlled display, therefore, the perfect precision a cycle of each batches.

Sb *Volumetric Dosing Line* SERIES

SB系列體積式色母機是適合射出成型機或小型押出機或吹瓶機及原料、色母、添加劑、粉碎料...等進料用。是直接接到機器上，具有小型性、快速性、精密性等特點。並利用直流馬達數位化驅動與數位化顯示器控制，精密確保完美分批進料的循環性。


Characteristics

- (1) Mechanistic structure designed for rapidly assembling and discharged.
- (2) Microprocessor adopted digital control and display screen-oriented.
- (3) Precision feeds material by 99 positions of digital potentiometer.
- (4) Rapidly speedy inspection the material volume design.
- (5) Speedy setting up and update 9 groups of programs memory.
- (6) Stabilizing and fluency feeding material with impeccability.
- (7) Equip with above SBM-Series blender .

特點


- (1) 機構結合、快速組合與拆卸的設計。
- (2) 微處理器採數位化控制及數位化顯示螢幕。
- (3) 數位處理器有99個位差控制，精確進料。
- (4) 快速檢測料量設計。
- (5) 9組程式記憶可快速設定與更新。
- (6) 穩定流暢進料，供料零缺點。
- (7) 可裝在SBM系列攪拌機上，組合使用。



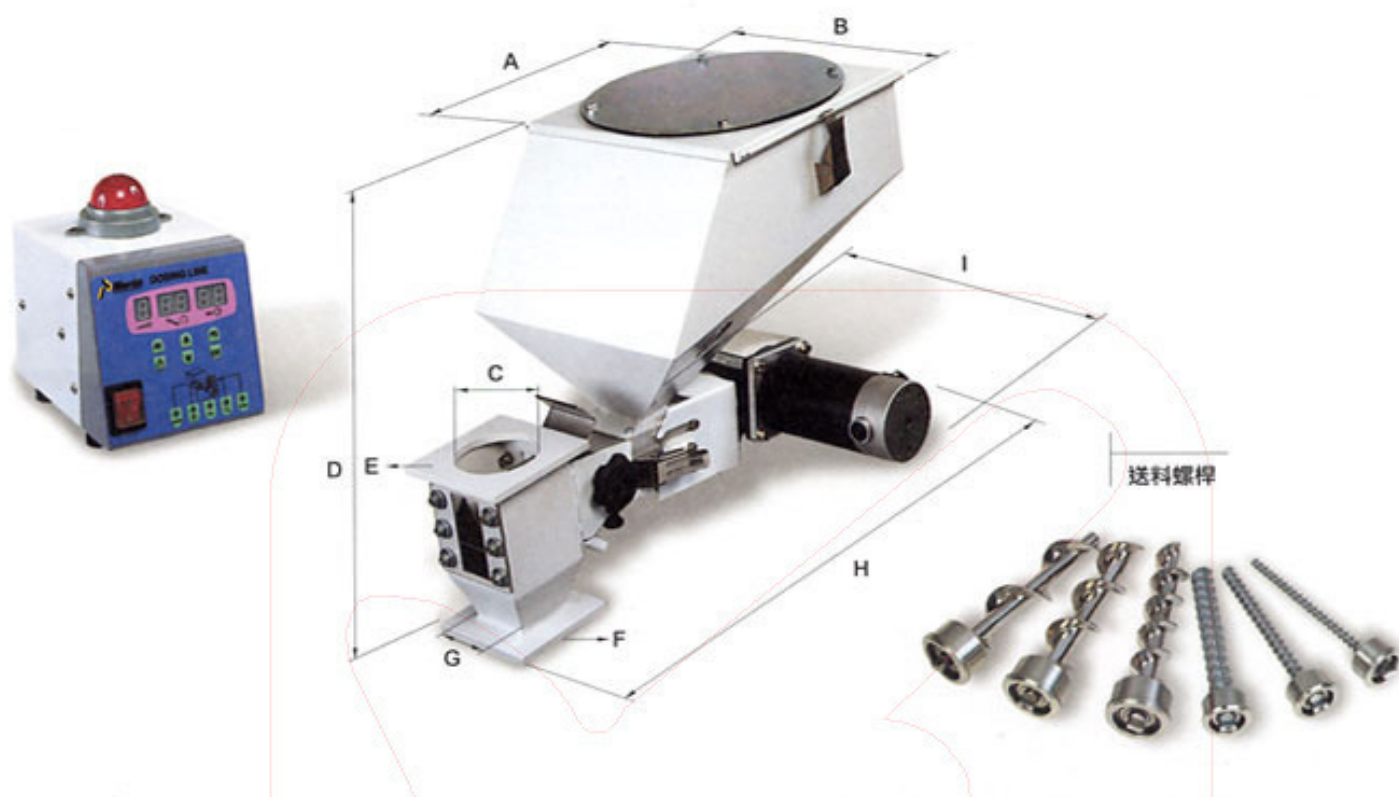

SPECIFICATIONS-OIL RECYCLE TYPE 油式模溫機規格表

MODEL	機型	SB-10	SB-20	SB-30	SB-40	SB-50	SB-60
Voltage	電壓	1 ϕ 200V-240V/50-60HZ					
Hopper Content	料斗容量	8 lit	8 lit	8 lit	8 lit	8 lit	8 lit
Screw Diameter	螺桿直徑	ϕ 12 mm	ϕ 17 mm	ϕ 25 mm	ϕ 40 mm	ϕ 50 mm	ϕ 50 mm
Screw Pitch	螺桿齒距	8 mm	10 mm	14 mm	40 mm	50 mm	85 mm
Work Capacity	工作量	0.09-2kg/h	0.15-3.5kg/h	0.6-6.5kg/h	1.5-50kg/h	3-100kg/h	6-180kg/h
Power	馬力	0.12kw	0.12kw	0.12kw	0.12kw	0.12kw	0.12kw
Machine Weight	重量	14.5kg	14.5kg	14.5kg	16.5kg	16.5kg	16.5kg
Noise Level	噪音值	<60 db	<60 db	<60 db	<60 db	<60 db	<60 db
A	尺寸	265 mm	265mm	265mm	265mm	265mm	265mm
B	尺寸	265 mm	265mm	265mm	265mm	265mm	265mm
C	尺寸	80 mm	80mm	80mm	90mm	90mm	90mm
D	尺寸	430 mm	430mm	430mm	475mm	475mm	475mm
E	尺寸	130×130mm	130×130mm	130×130mm	150×150mm	150×150mm	150×150mm
F	尺寸	130×130mm	130×130mm	130×130mm	150×150mm	150×150mm	150×150mm
G	尺寸	50mm	50mm	50mm	65mm	65mm	65mm
H	尺寸	580mm	580mm	580mm	625mm	625mm	625mm
I	尺寸	353mm	353mm	353mm	353mm	353mm	353mm

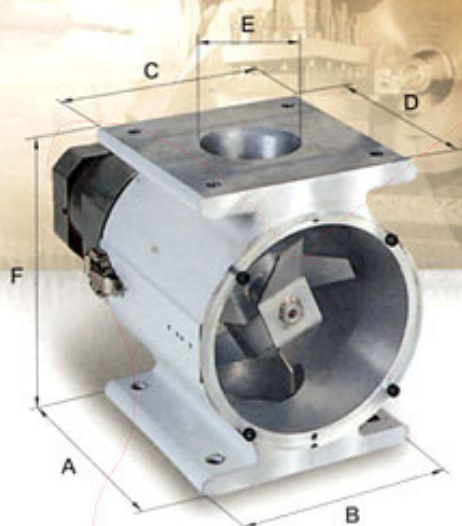

SBM-20


BLENDER 攪拌器			
Model	機型	SBM-20	SBM-30
Voltage	電壓	3 ϕ 200V~415V/50~60HZ	
Power	馬力	90 W	180 W
Content	容量	2 lit	8 lit
A×B	尺寸	165×165 mm	250×250mm
C×D	尺寸	165×165 mm	250×250 mm
E	尺寸	ϕ 70 mm	ϕ 110 mm
F	尺寸	215 mm	300 mm



CENTRALIZED SYSTEM 中央配料系統

MODEL	機型	SBS-100		SBS-200	
Capacity	工作量	100 kg/h		200 kg/h	
Material A	原料A	70~90%	70~90 kg/h	70~90%	140~180 kg/h
Crushed material B	粉碎料B	5~30%	5~30 kg/h	5~30%	10~60 kg/h
Dosing color C	色母C	1~3%	1~3 kg/h	1~3%	2~6 kg/h
Additive D	添加劑D	1~3%	1~3 kg/h	1~3%	2~6 kg/h
Blender	攪拌器	SBM-20		SBM-30	
Suction box	吸料盒	2孔 2 suction tub		4孔 4 suction tub	

ASSEMBLY IN MULTI-COMBINATION 多場合組合方式

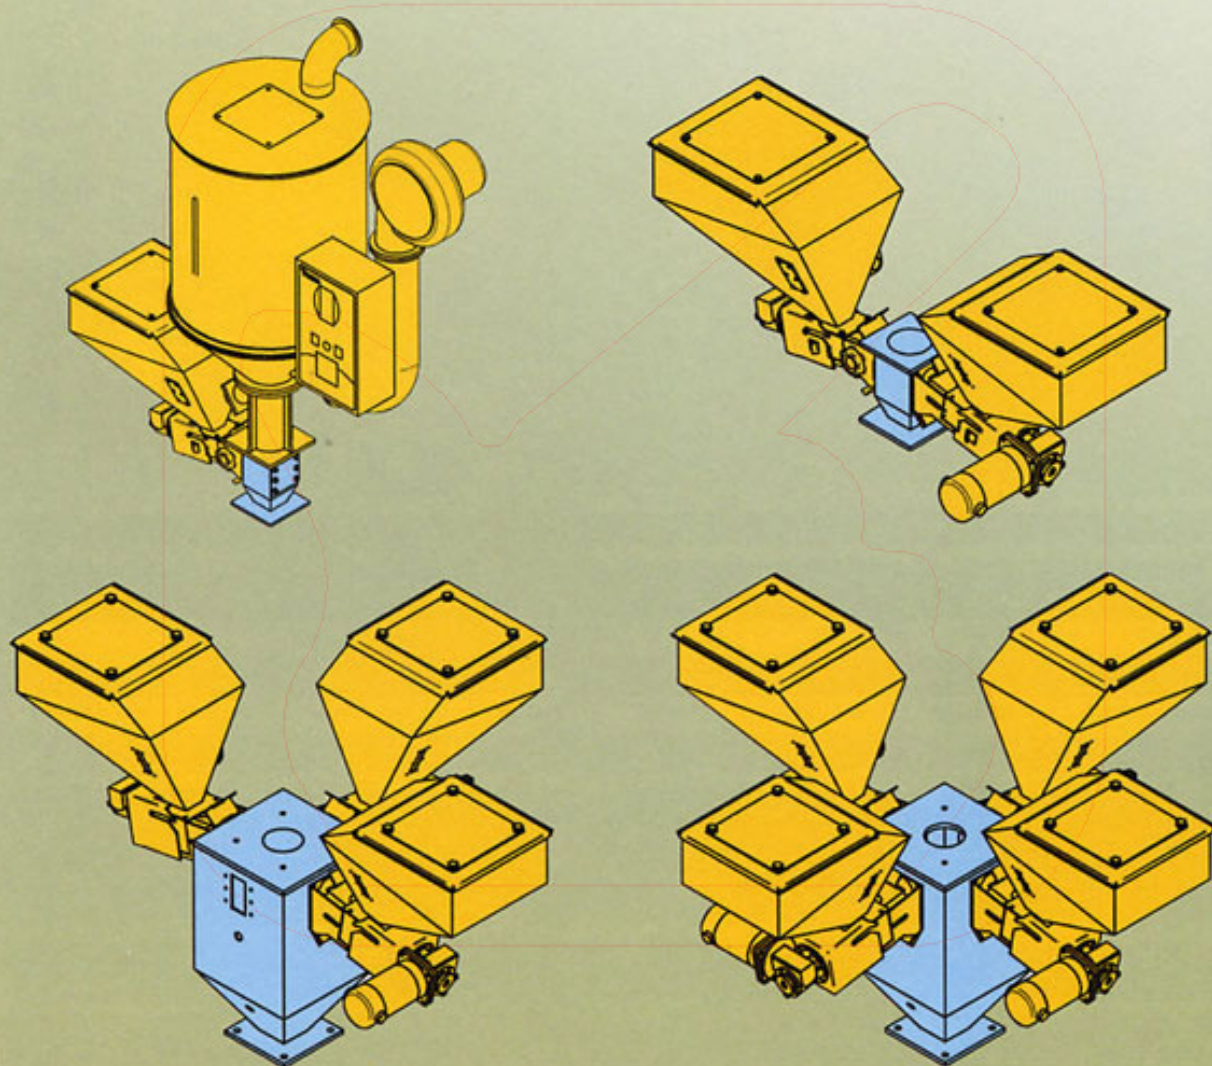

最新產品相關資料，請連結至普聯公司網站查詢。

For updated information, please visit Pulian's website at URL